

Model: C275D5

Powered by DCEC

Output Rating

MODEL		Power rating		Voltage available		
		PRIME(1)	STANDBY(2)			
C275D5	400V/50HZ	200KW	220KW	380/220V	400/230V	415/27V
	PF:0.8	250KVA	275KVA			


General Information

Model	C275D5	
Engine	6LTAA8.9G2	
Speed control type	Electrical	
Phase	3	
Control System	Digital	
System voltage	24V	
Frequency	50HZ	
Engine Speed(RPM)	1500	
Fuel Consumption (L/hr)	Standby power(2)	58
	Prime Power(1)	53
	75% prime power	39
	50% prime power	27



Dimension and Weight

Dimension	Open	Silent
Length (L)	2600mm	3560mm
Width (W)	990mm	1220mm
Height (H)	1611mm	1935mm
Net Weight	1250KG	1780KG

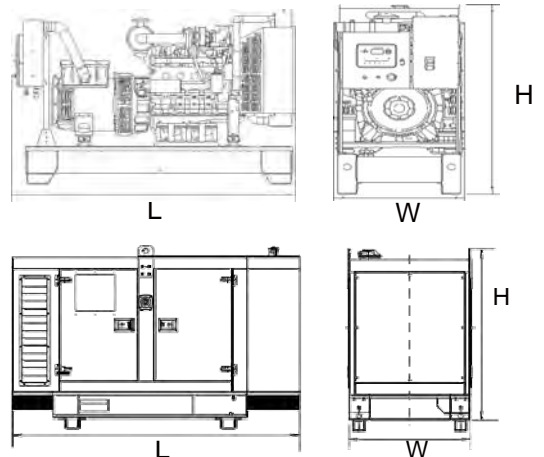

AGG POWER gensets are compliant with EC mark which include the following directives:

- * 2006/42/EC Machinery safety.
- * 2006/95/EC Low voltage
- * EN 60204-1: 2006+A1:2009, EN ISO 12100:2010, EN ISO 13849-1: 2008, EN 12601: 2010

(1) Prime Power (PRP):

According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operation conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24h of operation shall not exceed 70% of the PRP.

(2) Standby Power (ESP):

According to ISO 8528-1:2005, standby power is the maximum power available during a variable electrical power sequence, under the stated operation conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24h of operation shall not exceed 70% of the ESP.



■ Engine Specification

Compression Ratio:	16.6:1	Aspiration:	Turbocharged and Charge Air Cooled
Bore:	114 mm	Displacement:	8.9 L
Stroke:	145 mm	No. of Cylinders:	6
Emission Certification:	MEP STAGE II	Fuel System:	FR92516: BYC P7100/GAC
Governor Regulation:	≤3%		FR92996: BYC P7100/SEGMA

ENGINE MOUNTING

Maximum (Static) Bending Moment at Rear Face of Block.....	-N.m	1356
--	------	------

EXHAUST SYSTEM

Maximum Back Pressure.....	-kPa	10
----------------------------	------	----

AIR INTAKE SYSTEM

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	4

CHARGE AIR COOLING SYSTEM

Maximum Temp. Rise Between Engine Air Intake and Intake Manifold	-°C	25
Maximum Air Pressure Drop from Turbo Air outlet to Intake Manifold		
— 1500RPM.....	-kPa	8.5
— 1800RPM.....	-kPa	13.5
Maximum Intake Manifold Temperature Differential (Ambient to IMT) (IMTD).....	-°C	50
Maximum Intake Manifold Temperature for engine protection (Warning Threshold).....	-°C	93

LUBRICATION SYSTEM

Minimum Engine Oil Pressure for Engine Protection Devices:		
— Idle Speed.....	-kPa	103
— Governed Speed.....	-kPa	276-414
Maximum Oil Temperature.....	-°C	121
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	27.6

FUEL SYSTEM

Type Injection System.....	BYC P7100 Direct Injection
Maximum Restriction at Lift Pump.....	-kPa 20.3
Maximum Fuel Flow on the Supply Side of the Fuel Pump.....	-litre/hr 83
Maximum Fuel Inlet Temperature.....	-°C 70
Total Drain Flow (constant for all loads).....	-litre/hr 30

COOLING SYSTEM

Coolant Capacity - Engine Only.....	-litre	11.1
Maximum Coolant Friction Head External to Engine...-1800 rpm.....	-kPa	35
—1500 rpm.....	-kPa	28
Maximum Static Head of Coolant Above Engine Crank Centerline.....	-m	18.3
Standard Thermostat (Modulating) Range.....	-°C	82 - 93
Minimum Pressure Cap.....	-kPa	103
Maximum Top Tank Temperature for Standby / Prime Power.....	-°C	110 / 104



▪ Alternator

Alternator		
Poles	Num	4
Winding Connections (standard)		Star-serie
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		Brushless
Voltage Regulator		A.V.R. (Electronic)
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standard (Vacuum impregnation)

▪ Options

Engine	Alternator	Generator Sets	Fuel System	Canopy
<ul style="list-style-type: none"> •Water Jacket Preheater •Oil Preheater 	<ul style="list-style-type: none"> •Winding Temperature measuring Instrument •Alternator Preheater •PMG •Anti-damp and anti-corrosion treatment •Anti-condensation heater 	<ul style="list-style-type: none"> •Tools with the machine 	<ul style="list-style-type: none"> • Low fuel level alarm •Automatic fuel feeding system •Fuel T-valves 	<ul style="list-style-type: none"> •Rental Type Canopy •Trailer
Lubricating System	Exhaust System	Cooling System	Control Panel	Voltages
<ul style="list-style-type: none"> •Oil with the machine 	<ul style="list-style-type: none"> •Protection board from hotness 	<ul style="list-style-type: none"> • Front heat protection • Coolant (-30°C) 	<ul style="list-style-type: none"> •Remote control panel • ATS • Remote controller • Synchronizing controller 	<ul style="list-style-type: none"> • 415/240V • 380/220V • 220/127V • 220/127V • 200-115V



Control Panel



Product description

- Single gen-set controller for Stand-by and Prime-power applications
- Direct communication with EFI engines
- Total remote monitoring and control

Key features

- Easy to install, configure and use
- Wide range of communication capabilities including:
 - connection via RS232, RS485, CAN and on board USB
 - internet access using Ethernet or GPRS
 - support for Modbus and SNMP protocols
- Cloud-based monitoring and control
- Active SMS and emails in different languages
- 2x 5 A binary outputs for cranking and fuel solenoid
- Option for up to 16 additional binary inputs/outputs
- Flexible event based history with up to 350 events
- Load shedding, dummy load capability
- Automatic temperature based cooling/heating
- Comprehensive gen-set protections
- Multipurpose flexible timers
- True RMS measurement

Available extension modules

Product	Description	Order code
CM-Ethernet	Ethernet interface	CM2ETHERXBX
CM-GPRS	GSM modem / wireless internet	CM2GPRSXXBX
CM-RS232-485	Dual port interface	CM223248XBX
EM-BIO8-EFCP	8 additional binary inputs/outputs	EM2BIO8EXBX

Functions and protections

Description	ANSI code	Description	ANSI code
Over voltage	59	Load shedding	32P
Under voltage	27	Overload	32
Voltage asymmetry and Phase rotation**	47	Power factor	55
Over frequency	81H	Temperature	49T
Under frequency	81L	Gas (fuel) level	71
Over current*	50 + 51	Earth fault current	50N + 64
Current unbalance	46		

* Short current only

** Fixed setting

